

# **Munters PreCoolers Improving Gas Turbine Output All Over the World!**



## **Application Analysis**

### **The problem**

The design and development of combined cycle and gas turbine power plants has been progressing rapidly during the last ten years. Output and efficiency have increased substantially and significant research time has been spent on performance enhancement. Gas turbine outputs of greater

than 240 MW, and combined cycle efficiencies up to 60% have been achieved.

However, the power output and efficiency of gas turbines are strongly dependent on the ambient air conditions. An increase of the ambient air temperature decreases the power output rapidly.







The potential of Munters PreCooler technology offers a minimum peak power improvement of 5% for any gas turbine at any location in the world. Substantial power increases in excess of 25% are possible in hotter climates, on certain gas turbines. Even in the tropics, where evaporative cooling technology is the least effective, excellent cooling results have been achieved with the Munters PreCooler. This vast amount of incremental power is a very valuable benefit to any independent or national power producer. It can also be used to offset the progressing degradation of the installed gas turbines.

## Inlet air treatment

Munters have been actively researching and developing new air treatment systems, based on evaporative cooling technology. These systems have exceeded anything previously available in the power industry. This technology combines the optimization of the core components with

the development of modular systems for turnkey installations.


We have researched, in depth, global weather conditions, and are able to accurately calculate and guarantee the power improvements available. These guarantees include the peak power output and the average incremental output.

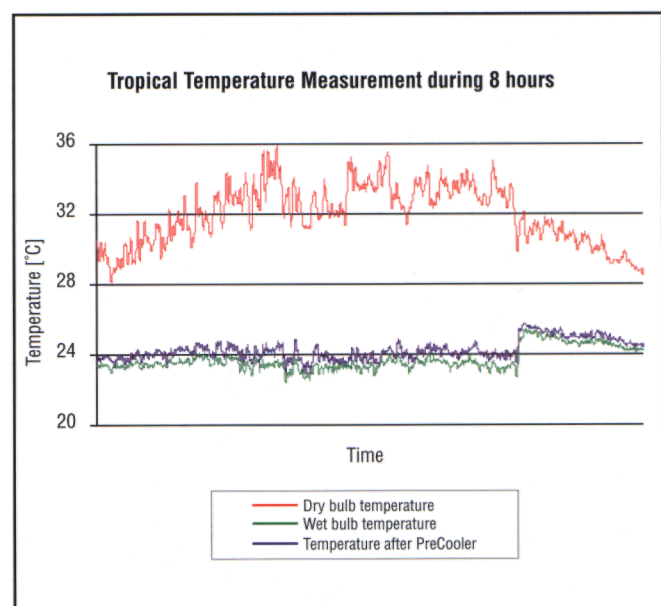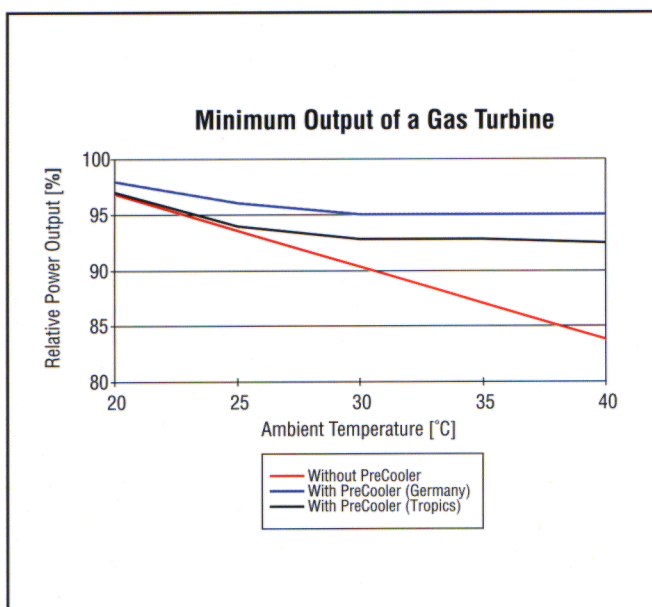



## The Munters method


Munters PreCooler is equipped with a high efficiency cooling media available in either CELdek® or the non flammable GLASdek®. The system is automatic in its operation, and the only utility required is water. Whether the requirement is for a retrofit of an existing installation, or a completely new plant, Munters offer the total supply including any utilities, ie water treatment.

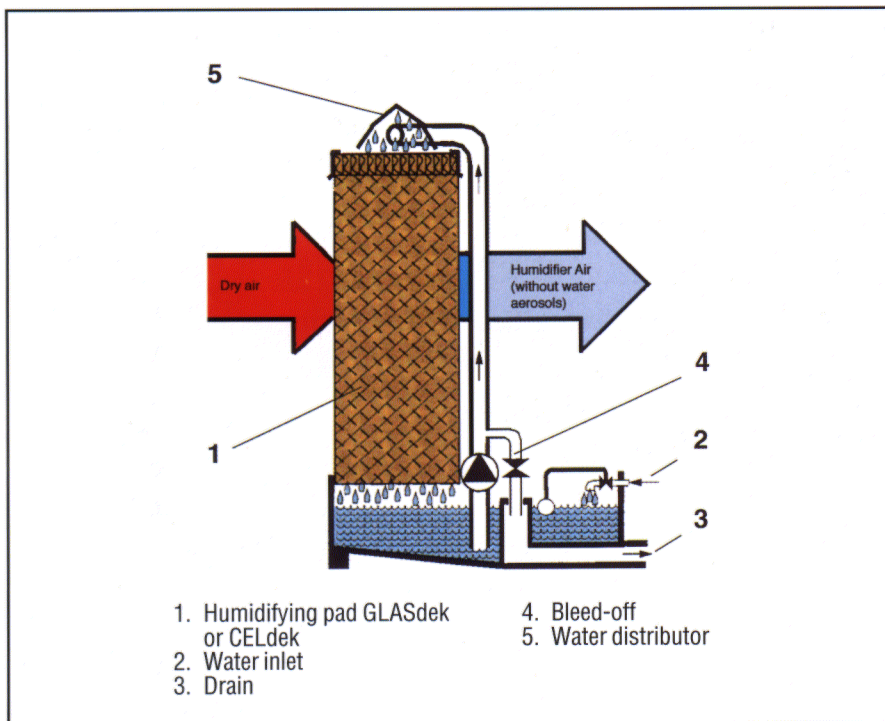

Principle – The “Munters” method

## Design features

- Structural steel made from stainless steel or/and galvanized steel
- Stainless steel modules accomodating humidifier pads of CELdek or GLASdek
- Water circulating system including stainless steel piping, stainless steel valves and stainless steel watertank
- Stainless steel covers
- Biocide treatment
- Blow down unit
- Switchboard for automatic operation and remote start-up and shutdown

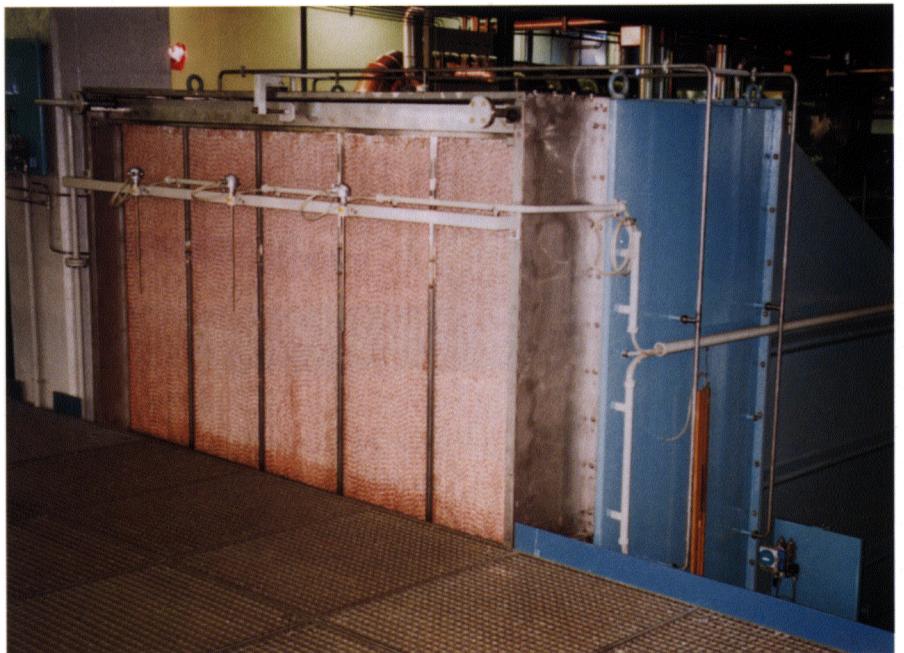



## Benefits

- **Increased power output**

The water is evaporated to pure cold vapour by the Munters PreCooler. This produces the required cooling effect, providing an intake air at higher density. This allows the gas turbine to produce the increased power output and operating efficiency.

- **Low investment and operational cost**

By using natural principles, the Munters PreCooler has a low investment and operational cost. A short pay-back period of 12–24 months is possible due to very low operational costs. The utility costs of the system are water consumption of normally 0.6–1.2 m<sup>3</sup> per additional MWH produced and power consumed by the feed pumps which is less than 0.5% of the additional power produced.

For new installations Munters are able to offer the additional advantage of integration of the intake air filtration into the PreCooler. This substantially reduces the investment cost of both air filters and coolers by supplying one combined housing.

- **Filtration ability**

An additional benefit of the Munters PreCooler is the air filtration ability. If installed prior to the first filter stage, it will remove approximately 90% of the particles normally removed by the first air filter stage. This significantly


increases service life and therefore reduces the maintenance costs. This benefit is also extended to the fine filters, where the dust load is reduced by approximately 30% by the PreCooler.

- **Noise control**

Due to the PreCooler's positioning on the intake air system, noise reduction of between 2–10 dB are produced dependant on the frequency band.

- **Low pressure drop**

Standard pressure drop of a Munters PreCooler is only 50–100 Pa, which is negligible when compared with the pressure drop of 250–1200 Pa by standard air filters. The PreCooler provides aerosol-free cooled air at a constant pressure drop throughout the year.

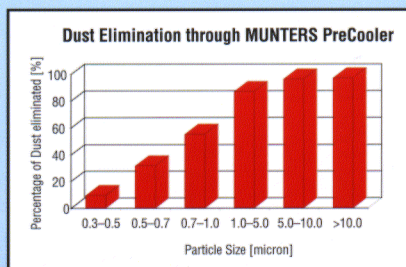

**Munters Europe AB - HumiCool Division**  
Homepage: [www.munters.com](http://www.munters.com)

FINLAND  
Munters Oy  
PL 4  
FIN-01301 Vantaa  
Tel: +358 9 8386 03350  
Fax: +358 9 8386 0336

SCANDINAVIA AND EXPORT  
Munters Europe AB  
HumiCool Division  
P O Box 434  
S-191 24 Sollentuna  
Tel: +46 8 626 63 00  
Fax: +46 8 754 56 66

FRANCE  
Munters S.A.  
142-176 Av. de Stalingrad  
Bâtiment 5  
F-92712 Colombes Cedex  
Tel: +33 1 41 19 24 51  
Fax: +33 1 41 19 00 17

SOUTH AFRICA  
Munters (Pty) Ltd.  
P O Box 4539  
Edenvale 1610  
Tel: +27 11 455 2550  
Fax: +27 11 455 2553

GERMANY  
Munters Euroform GmbH  
Division HumiCool  
Postfach 1089  
D-52011 Aachen  
Tel: +49 241 890 00  
Fax: +49 241 890 0189

SPAIN  
Munters Spain S.A.  
Europa Empresarial, Ed.Londres  
c/Playa de Lienres no. 2  
E-28230 Las Rozas de Madrid  
Tel: +34 91 640 0902  
Fax: +34 91 640 1132

KINGDOM OF SAUDI ARABIA  
Hawa Munters Co. Ltd  
P O Box 3790  
Riyadh 11481  
Tel: +966 1 477 1514  
Fax: +966 1 476 0936

UNITED KINGDOM  
Munters Ltd.  
Blackstone Road  
Huntingdon Cambs PE18 6EF  
Tel: +44 1480 442 340  
Fax: +44 1480 411 332

HC/MMA/ AaGB-0017-05/99